







Roller Chain Pin Extractor

Chain Connecting Tool

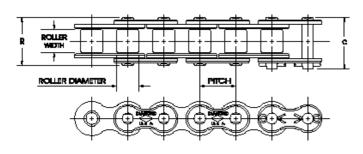



Dimensions in Inches and Pounds

ANSI Number	Pitch Inches	Roller Width	Roller Diameter	Pin Diameter	Link Plate Thickness	С	R	К	Weight Per Foot	Average Tensile Strength
60H	3/4	1/2	.469	.234	.125	1.24	1.17		1.18	8500
60H-2	3/4	1/2	.469	.234	.125	2.27	2.20	1.028	2.33	17000
60H-3	3/4	1/2	.469	.234	.125	3.31	3.24	1.028	3.47	25500
60H-4	3/4	1/2	.469	.234	.125	4.34	4.26	1.028	4.61	34000
80H	1	5/8	.625	.312	.156	1.57	1.45		2.02	14500
80H-2	1	5/8	.625	.312	.156	2.84	2.72	1.283	3.93	29000
80H-3	1	5/8	.625	.312	.156	4.14	4.02	1.283	5.92	43500
80H-4	1	5/8	.625	.312	.156	5.42	5.30	1.283	7.87	58000
100H	11/4	3/4	.750	.375	.187	1.86	1.74		2.82	24000
100H-2	1 ¹ /4	3/4	.750	.375	.187	3.41	3.28	1.539	5.58	48000
100H-3	1 ¹ /4	3/4	.750	.375	.187	4.95	4.82	1.539	8.32	72000
100H-4	1 ¹ /4	3/4	.750	.375	.187	6.49	6.37	1.539	11.04	96000
120H	11/2	1	.875	.437	.219	2.27	2.13		4.08	34000
120H-2	11/2	1	.875	.437	.219	4.20	4.06	1.924	8.04	68000
120H-3	1 ¹ /2	1	.875	.437	.219	6.13	5.99	1.924	11.99	102000
120H-4	11/2	1	.875	.437	.219	8.06	7.92	1.924	15.94	136000
120H-6	11/2	1	.875	.437	.219	11.91	11.77	1.924	23.84	204000
140H	13/4	1	1.000	.500	.250	2.44	2.28		5.40	46000
140H-2	13/4	1	1.000	.500	.250	4.50	4.34	2.055	10.65	92000
140H-3	13/4	1	1.000	.500	.250	6.56	6.39	2.055	15.90	138000
140H-4	13/4	1	1.000	.500	.250	8.62	8.45	2.055	21.10	184000
160H	2	11/4	1.125	.562	.281	2.86	2.68		7.03	58000
160H-2	2	11/4	1.125	.562	.281	5.30	5.12	2.436	13.88	116000
160H-3	2	11/4	1.125	.562	.281	7.75	7.56	2.436	20.68	174000
160H-4	2	11/4	1.125	.562	.281	10.17	10.00	2.436	27.62	232000
180H	21/4	113/32	1.406	.687	.312	3.28	3.01		9.59	76000
180H-2	2 ¹ / ₄	1 ¹³ /32	1.406	.687	.312	6.00	5.73	2.723	18.86	152000
180H-3	21/4	113/32	1.406	.687	.312	8.73	8.46	2.723	28.14	228000
200H	2 ¹ / ₂	11/2	1.562	.781	.375	3.71	3.39		13.38	110000
200H-2	2 ¹ / ₂	11/2	1.562	.781	.375	6.79	6.48	3.083	26.38	220000
200H-3	21/2	11/2	1.562	.781	.375	9.88	9.56	3.083	40.85	330000